
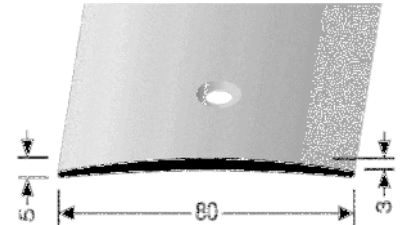


- **Profile Type:**

465

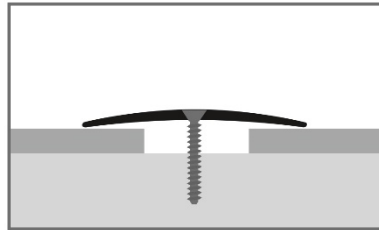

- **Description:**

connecting profile, centrally countersunk drilled

- **Application:**

For transitions in elastic, textile, ceramic or hard floor coverings in the living area.

- **Length:**

5,0 m
2,7 m
1,0 m

hole spacing:

16,6 cm

hole spacing:

15,0 cm

hole spacing:

16,6 cm

- **Width:**

80 mm

- **Height:**

5,0 mm

- **Profile strength:**

3,0 mm

- **Alloy of the profile:**

Alu: EN AW-6060

- **Anodized colours:**

alu anodized silver

F4

alu anodized gold

F5

alu anodized sand

F9

alu anodized bronze

F6

alu anodized stainless steel optic

F2G

- **Fire protection class:**

A1 = non-combustible

The values mentioned are typical or average values, but are not considered as guaranteed properties. This product is not subject to the Construction Products Ordinance.

Assembly/Installation



Screw connection with Torx screws \varnothing 3.5 mm. The substrate must be flat, hard, dry and load-bearing.

Produktdatenblatt



- **Profile type:**

465 S

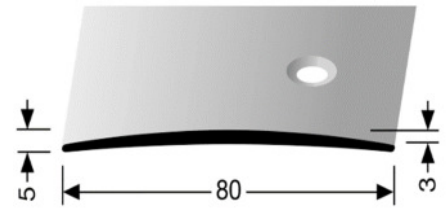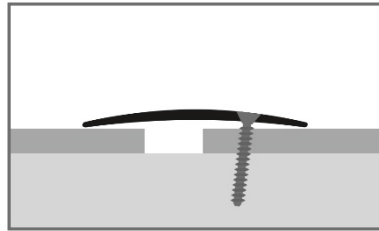

- **Description:**

connecting profile, laterally countersunk drilled

- **Application:**

For transitions in elastic, textile, ceramic or hard floor coverings in the living area.

- **Length:**

5,0 m
2,7 m
1,0 m

hole spacing:

16,6 cm

hole spacing:

15,0 cm

hole spacing:

16,6 cm

- **Width:**

80 mm

- **Height:**

5,0 mm

- **Profile strength:**

3,0 mm

- **Alloy of the profile:**

Alu: EN AW-6060

- **Anodized colours:**

alu anodized silver
alu anodized gold

F4

F5

- **Fire protection class:**


A1 = non-combustible

The values mentioned are typical or average values, but are not considered as guaranteed properties. This product is not subject to the Construction Products Ordinance.


Assembly/Installation

Screw connection with Torx screws \varnothing 3.5 mm. The substrate must be flat, hard, dry and load-bearing.

Küberit Profile Systems GmbH & Co. KG
Römerweg 9
D-58513 Lüdenscheid
Tel.: +49 (0) 23 51 / 95 07 - 0
Fax: +49 (0) 23 51 / 95 07 - 49

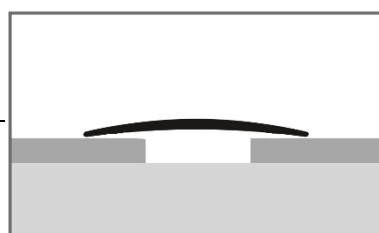

Datum/date: 27.09.2019

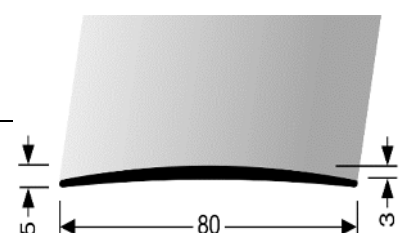

www.kueberit.com

Produktdatenblatt



- **Profile type:**

465 U

- **Description:** connecting profile, undrilled
- **Application:** For transitions in elastic, textile, ceramic or hard floor coverings in the living area.
- **Length:** 5,0 m
2,7 m
1,0 m
- **Width:** 80 mm
- **Height:** 5,0 mm
- **Profile strength:** 3,0 mm
- **Alloy of the profile:** Alu: EN AW-6060
- **Anodized colours:**

alu polished	F3
alu anodized silver	F4
alu anodized gold	F5
alu anodized sand	F9
alu anodized bronze	F6
alu anodized stainless steel optic	F2G
- **Fire protection class:** A1 = non-combustible

The values mentioned are typical or average values, but are not considered as guaranteed properties. This product is not subject to the Construction Products Ordinance.

Assembly/Installation

Screw connection with Torx screws Ø 3.5 mm. The substrate must be flat, hard, dry and load-bearing.