



Product specification sheet



- Profile type:

701

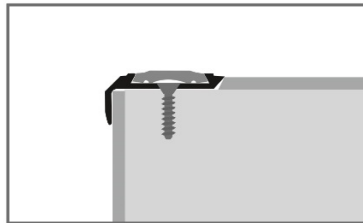

- Type:

701

- Description:

Stair nosing for slip-resistant insert, made of aluminium, countersunk drilled

- Application:

protection of the stair nosing's corners

- Length of the profile:

2.5 m / 5.0 m

- Width of the profile:

42 mm

- Height of the profile:

153 mm

- Alloy of the profile:

AlMgSi0,5F22 / MS58

- Anodized colours:

F4 silver, **F5** gold, **F9** sand, **F6** bronze, **F2** stainless steel optic

- Additional colours:

F3 aluminium polished, **F7** brass polished

- Fixation:


screwing, countersunk drilled holes 3,0 mm



- insert:

2504 slip resistant: F100 black, F130 brown, F190 yellow, F140 antracite, F142 light grey, F169 blue, F184 green, F130 red, F200 photoluminescent, F149 beige

2505 plain: F100 black, F130 brown, F190 yellow, F140 antracite, F142 light grey, F169 blue, F184 green, F130 red, F200 photoluminescent, F149 beige





Installation/Laying

1. The metal stair nosings have countersunk holes in their dovetailing guides (into which the inserts are subsequently fitted). They are fastened on the step by screwing them (for stair use dowels). A perfect glue bond was successfully obtained,
2. The PVC-insert should be cut to the desired fixed size in cold condition.
3. The two next expansion joint on the back side allow to compress the tempered insert (at room temperature) and to fix it easily overhand into the dovetailing guide of the metal stair nosing.

Attention! Very important!

The PVC-insert will normally be taken to the building site in cold condition. Naturally the PVC-insert is so rigid in that condition that it can hardly be compressed. Then it is very important to heat the insert in room temperature. This condition is obtained when the insert can be compressed by your fingers. Take care, however, not to heat the insert more than necessary, because otherwise it will tend first to expand and then to shrink.

4. We recommend to glue the PVC-insert punctually on the profile to prevent a possible shrinkage.
5. If any further information is required, please do not hesitate to contact Küberit, +49 2351 95070 or fax on +49 2351 9507200 or use our installation guideline movies on YouTube.

The indicated data are typical or average values, but are not assured attributes. This product is not subject to the Construction Products Regulation.